

## Wooden balcony door System DDF-92

## 2-sash with movable post and standard threshold

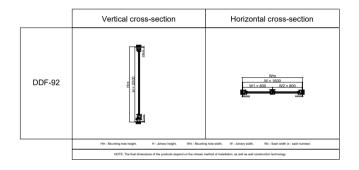

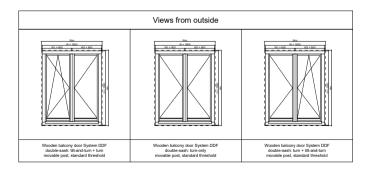

## Wooden balcony door System DDF

- Window finish with a modern, simple form, in line with current trends
- Thermal and acoustic insulation parameters in accordance with building standards given in the table below
- Highest comfort of use
- Variants of wood type: pine, meranti

Prestigious series of DAKO wooden windows DDF, taking full advantage of the extraordinary value of carefully selected natural raw material. The simple form of the profile shape gives the windows a modern character and perfectly fits into the trends of minimalist architecture. The advanced technology used in the production of the window has won the recognition of customers, confirmed by awards from industry experts.

		Parameters of wooden reference window (single-sash window 1230x1480mm)								
Glazing package	Uw	Ug	TET (g)	LT	Resistance to wind load	Waterproofing	Air permeability	Rw		
4x16x4	1,3	1	0,5	0,68	NPD	7A	4	33dB		
4x14x4x14x4	0,95	0,6	0,53	0,74	NPD	E900	4	34dB		
4x16x4x16x4	0,83	0,5	0,38	0,59	NPD	5A	4	34dB		
	4x16x4 4x16x4 4x14x4x14x4 4x16x4x16x4	package	package	package	Description   Description	package OW Ug LET (g) LT wind load   4x16x4 1,3 1 0,5 0,68 NPD   4x16x4x14x4 0,95 0,6 0,53 0,74 NPD   4x16x4x16x4 0,83 0,5 0,38 0,59 NPD	package UW Ug TET (g) L1 wind load   4x16x4 1,3 1 0,5 0,68 NPD 7A   4x16x4x16x4 0,95 0,6 0,53 0,74 NPD E900   4x16x4x16x4 0,83 0,5 0,38 0,59 NPD 5A	package UW Ug LET (g) LT wind load   4x16x4 1,3 1 0,5 0,88 NPD 7A 4   4x16x4x14x4 0,95 0,6 0,53 0,74 NPD E900 4   4x16x4x16x4 0,83 0,5 0,38 0,59 NPD 5A 4		