

Wooden balcony door System DDR-78 2-sash with movable post and standard threshold

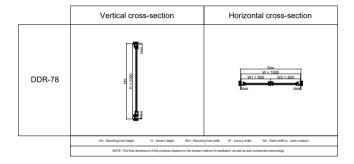

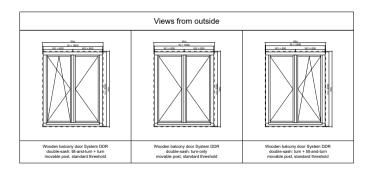

Wooden balcony door System DDR

- Unique finishing shape in classic rustic style,
- Decorative milling to emphasize the character of stylish interiors,
- Stylized edges of outer sashes, frame and glazing beads,
- Parameters of thermal and acoustic insulation in accordance with building standards given in the table.
- Variants of wood type: pine, meranti, spruce (DDR-78)

Sophisticated series of wooden windows DDR, with an enriched profile line that gives the windows a unique and subtle appearance. The series allows use in buildings that require individual treatment and unconventional solutions. Decorative milling of the outer edges of the sashes and glazing beads give the windows an extremely elegant character, emphasizing the rustic character of buildings with stylish architecture and warm, traditional interiors.

| Parameters of wooden reference window (single-sash window 1230x1480mm) | | | | | | | | | |
|--|---------------------------|-------------------|--------------------------|--------------------------|-----------------------|--------------------------------------|---------------|-----------------------------|------|
| System | Glazing package | Uw | Ug | TET (g) | LT | Resistance to wind load | Waterproofing | Air permeability | Rw |
| DDR-68 | 4x16x4 | 1,3 | 1 | 0,5 | 0,68 | NPD | 7A | 4 | 33dB |
| DDR-78 | 4x14x4x14x4 | 0,95 | 0,6 | 0,53 | 0,74 | NPD | E900 | 4 | 34dB |
| DDR-92 | 4x16x4x16x4 | 0,83 | 0,5 | 0,38 | 0,59 | NPD | 5A | 4 | 34dB |
| Uw-I | nest transfer coefficient | of the window, Ug | - heat transfer coeffici | ent of the glazing packs | age, TET(g) - solar e | TET(g) - solar energy transmittance, | | n, Rw - accustic properties | |