


Wooden balcony door System DDR-68

2-sash with fixed post and low threshold


Wooden balcony door System DDR

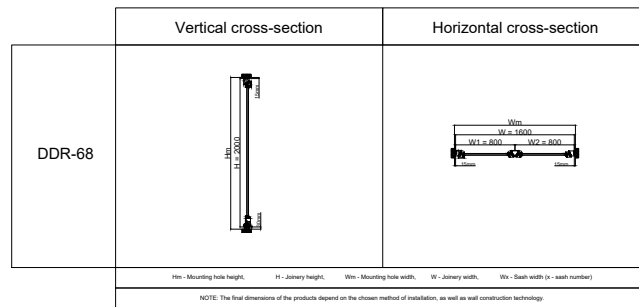

- Unique finishing shape in classic rustic style,
- Decorative milling to emphasize the character of stylish interiors,
- Stylized edges of outer sashes, frame and glazing beads,
- Parameters of thermal and acoustic insulation in accordance with building standards given in the table,
- Variants of wood type: pine, meranti, spruce (DDR-78)

Sophisticated series of wooden windows DDR, with an enriched profile line that gives the windows a unique and subtle appearance. The series allows use in buildings that require individual treatment and unconventional solutions. Decorative milling of the outer edges of the sashes and glazing beads give the windows an extremely elegant character, emphasizing the rustic character of buildings with stylish architecture and warm, traditional interiors.

In addition, the use of a low threshold in summer allows you to effectively "connect" the interior of the house with the terrace - so that the terrace becomes, in a way, an extension of the living space. A low threshold, flush with the floor, also reduces the risk of tripping and can be a convenience for children, the elderly or those moving on crutches or in a wheelchair.

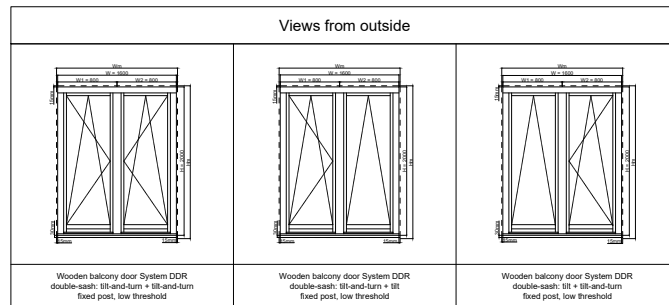

Parameters of wooden reference window (single-sash window 1230x1480mm)										
System	Glazing package	Uw	Ug	TET (g)	LT	Resistance to wind load	Waterproofing	Air permeability	Rw	
DDR-68	4x16x4	1,3	1	0,5	0,68	NPD	7A	4	33dB	
DDR-78	4x14x4x14x4	0,95	0,6	0,53	0,74	NPD	E900	4	34dB	
DDR-92	4x16x4x16x4	0,83	0,5	0,38	0,59	NPD	5A	4	34dB	

Uw - heat transfer coefficient of the window, Ug - heat transfer coefficient of the glazing package, TET(g) - solar energy transmittance, LT - light transmission, Rw - acoustic properties